

# PRESA

INTERNATIONAL CATALOG







## What makes Presa different

At Presa Tyres we've focused our research on producing the quiet tyre. Our TNR (Tyre Noise Reduction) technology leads the industry in reducing noise pollution.

Not that grip and handling have been ignored, because all round these are technologically advanced products, manufactured to exacting standards. We have learnt from the past and have deigned in quality and designed out cost. So, Presa Tyres are not only outstanding performaers,they are also sensibly priced

Specially-formulated Silica Tread Compound brings fuel economy and traction-both wet and dry - to a new level

Jointless spiral-wrapped full nylon cap enhances tyre uniformity for smooth ride and improved durability

Reinforced steel belts offer superior high-speed stability and longer tread life

Hard bead filler compound for excellent cornering, acceleration and handling

Jointless spiral-wrapped bead wire design provides strength and comfort

Reinforced casing and body-ply structure provide excellent handling and stability



— An intelligent choice






PSE1



A new standard in eco-friendly technology

### Tread Pattern Features

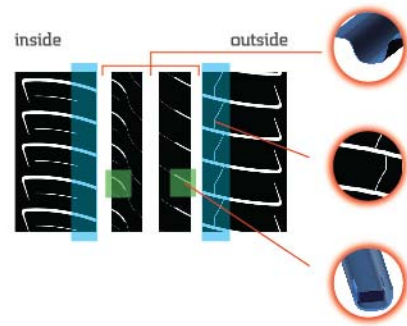

**Arc Groove Design**  
Improves water dispersion efficiency for excellent wet weather performance

**Lateral Groove Bridge Design**  
Maximizes shoulder block stiffness for improved steering response and handling

**Sipe Bridge Design**  
Enhances tread block stiffness for improved wear

### Construction Features




**High-Tension Nylon Cap Ply**  
Enhances tread stiffness for improved high-speed stability and handling

**High-Strength Steel Belt Package**  
Further enhances tread stiffness


**Computer-Optimized Bead Design**  
Improves shock absorption from wheel for reduced rolling resistance

### Tire Profile Design

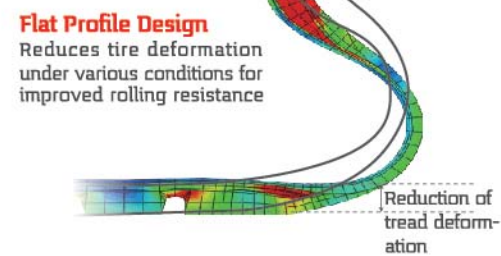


**Flat Profile Design**  
Reduces tire deformation under various conditions for improved rolling resistance

### Compound Features

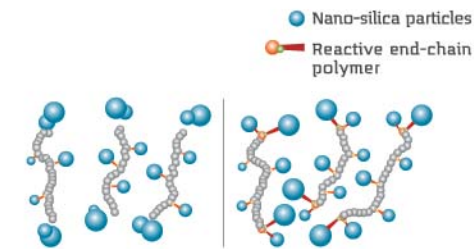

New Nano-silica compound with reactive end-chain polymers (N.S.T) enhances molecular bonding and improves wet traction and rolling resistance

### Performance Comparison

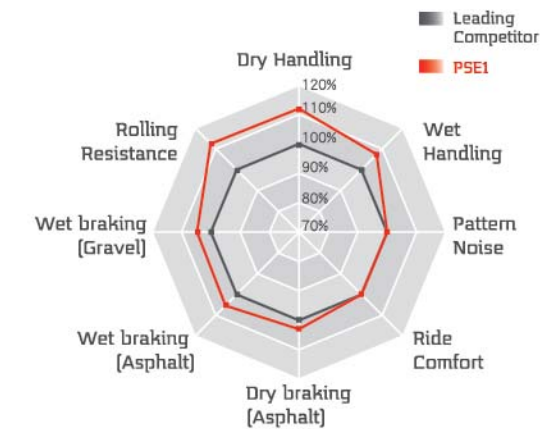

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 175/65R14 | 82         | H            | TBD                   | TBD                | 5.0                     | 475           | 300                |
| 185/55R15 | 82         | H            | TBD                   | TBD                | 6.0                     | 475           | 300                |
| 185/55R16 | 87         | H            | TBD                   | TBD                | 6.0                     | 545           | 340                |
| 185/60R14 | 82         | H            | 578                   | 189                | 5.5                     | 475           | 300                |
| 185/60R15 | 88         | H            | TBD                   | TBD                | 5.5                     | 560           | 340                |
| 185/65R14 | 86         | H            | 593                   | 188                | 5.5                     | 530           | 300                |
| 195/50R15 | 82         | H            | TBD                   | TBD                | 6.0                     | 530           | 340                |
| 195/55R15 | 85         | V            | 597                   | 202                | 6.0                     | 515           | 300                |
| 195/60R15 | 88         | V            | 618                   | 202                | 6.0                     | 560           | 300                |
| 195/65R15 | 91         | H            | 633                   | 202                | 6.0                     | 615           | 300                |
| 205/55R16 | 91         | V            | 638                   | 215                | 6.5                     | 615           | 300                |
| 205/65R15 | 94         | H            | TBD                   | TBD                | 6.0                     | 670           | 300                |






PS03

A new standard in ride comfort and durability,  
the connoisseur's touring tire

### Tread Pattern Features




- 1 Continuous Shoulder Block Design** – Improves road contact for enhanced lateral traction and steering response
- 2 Five-Rib Pattern Design with Micro Shoulder Sipes** – Improves compliance in the tread area for excellent ride comfort
- 3 Four-Circumferential-Groove Design** – Improves water dispersion efficiency for excellent hydroplaning resistance and peace of mind in inclement weather
- 4 Traction Groove Design on shoulders** helps break water film surface for improved traction on wet surfaces
- 5 Variable Pitch Tread Design** – Creates virtual white noise which helps minimize perceived pattern noise
- 6 Center Rib Design** – Increases road contact for improved high-speed stability; while minimizing irregular wear
- 7 Curved Shoulder Groove Design** – Reduces air vibration noise

### Construction Features




- Advanced Tread Compound with high tear-resistance for excellent longevity
- High-tensile strength steel belt package maximizes tread stiffness for excellent high-speed stability and handling
- Slim apex design enhances ride comfort and overall handling

### Compound Features

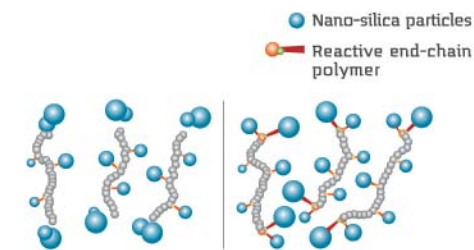

New Nano-silica compound with reactive end-chain polymers (N.S.T) enhances molecular bonding and improves wet traction and rolling resistance

### Performance Comparison

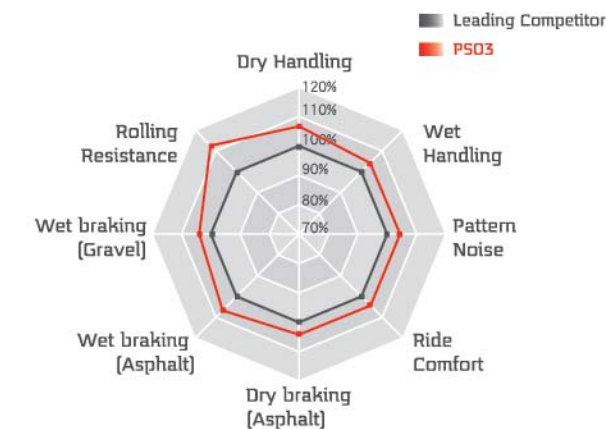

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 205/60R16 | 92         | V            | 652                   | 209                | 6.0                     | 630           | 300                |
| 215/55R17 | 94         | V            | 670                   | 224                | 7.0                     | 670           | 300                |
| 215/60R16 | 95         | V            | TBD                   | TBD                | 6.5                     | 690           | 300                |
| 225/55R18 | 98         | V            | TBD                   | TBD                | 7.0                     | 750           | 300                |
| 225/60R17 | 99         | H            | TBD                   | TBD                | 6.5                     | 775           | 300                |
| 225/65R17 | 102        | H            | 724                   | 228                | 6.5                     | 850           | 300                |






P166

*A new standard in driving excitement, the sophisticated driver's choice*

### Tread Pattern Features



- 1 Staggered Circumferential Groove Design** – Increases water dispersion efficiency for improved hydroplaning resistance
- 2 Center-Rib Pattern Design** – Increases road contact for improved high-speed stability; while minimizing irregular wear
- 3 Aggressive Outer Shoulder Design** – Maximizes tread stiffness for excellent handling
- 4 Chamfered Groove Design** – Increases tread stiffness for improved wear pattern, handling and cornering traction


### Construction Features

- Innovative Casing Design** – Increases overall tire stiffness for excellent handling and durability
- Reinforcement Package** – High-strength steel belts and nylon cap ply further improve casing stiffness




### Tire Profile Design

New Hybrid Profile Design maximizes road contact for improved overall wear

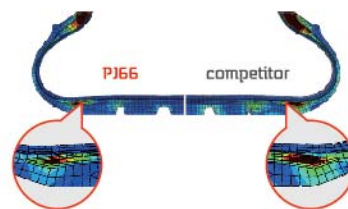


### Compound Features

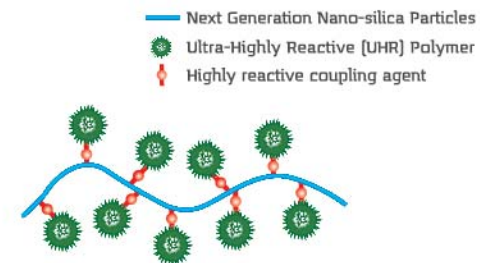

- Performance-oriented tread compound
- UHR polymers provide excellent traction in spirited driving conditions
- Next Generation Nano-silica Particles maximize mileage performance

### Performance comparison

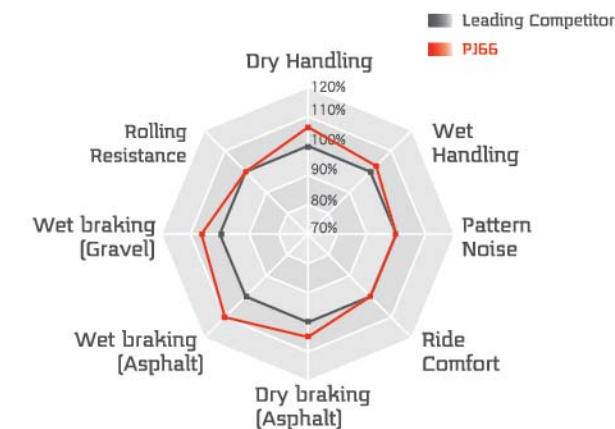

| Tyre Size  | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 205/45ZR16 | 87-XL      | W            | TBD                   | TBD                | 7.0                     | 545           | 340                |
| 205/50R17  | 93         | W            | TBD                   | TBD                | 6.5                     | 650           | 340                |
| 215/45ZR17 | 91-XL      | W            | 624                   | 230                | 7.0                     | 615           | 340                |
| 215/45ZR18 | 93-XL      | W            | 649                   | 230                | 7.0                     | 650           | 340                |
| 225/40ZR18 | 92-XL      | W            | TBD                   | TBD                | 8.0                     | 630           | 340                |
| 225/45ZR17 | 94-XL      | W            | 632                   | 242                | 7.5                     | 670           | 340                |
| 225/50R17  | 98         | W            | TBD                   | TBD                | 7.0                     | 750           | 340                |
| 235/50R18  | 101        | W            | TBD                   | TBD                | 7.5                     | 825           | 340                |
| 235/55R19  | 101        | V            | 742                   | 245                | 7.5                     | 825           | 300                |
| 235/55ZR18 | 100-XL     | W            | 717                   | 247                | 7.5                     | 800           | 350                |
| 235/60R17  | 102        | V            | 714                   | 236                | 7.0                     | 850           | 300                |



# PJ66

| Tyre Size  | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 235/60R19  | 101        | H            | 763                   | 244                | 7.0                     | 825           | 300                |
| 245/45ZR20 | 103-XL     | W            | 721                   | 262                | 8.0                     | 875           | 340                |
| 245/50ZR20 | 102-XL     | W            | TBD                   | TBD                | 7.5                     | 850           | 350                |
| 245/60R18  | 105        | V            | 751                   | 251                | 7.0                     | 925           | 300                |
| 255/45ZR20 | 105-XL     | W            | 736                   | 274                | 8.5                     | 925           | 340                |
| 255/55ZR18 | 109-XL     | W            | 736                   | 265                | 8.0                     | 1030          | 340                |
| 255/60R19  | 109        | V            | TBD                   | TBD                | 7.5                     | 1030          | 300                |
| 265/70R18  | 116        | H            | 830                   | 269                | 8.0                     | 1250          | 300                |
| 275/40ZR19 | 105-XL     | W            | 704                   | 276                | 9.5                     | 925           | 340                |
| 275/40ZR20 | 106-XL     | W            | 730                   | 276                | 9.5                     | 950           | 340                |
| 275/45ZR19 | 108-XL     | W            | TBD                   | TBD                | 9.0                     | 1000          | 340                |
| 275/55R20  | 117        | V            | TBD                   | TBD                | 8.5                     | 1285          | 340                |
| 275/60R20  | 115        | V            | TBD                   | TBD                | 8.0                     | 1215          | 300                |
| 285/50R20  | 112        | V            | 796                   | 294                | 9.0                     | 1120          | 300                |
| 305/40R22  | 114        | V            | TBD                   | TBD                | 11.0                    | 1180          | 340                |



TOMORROW'S TYRE TODAY





PS01

- Jointless spiral-wrapped full nylon cap/edge ply for added strength and stability
- Aggressive tread design with 4+1 circumferential grooves gives excellent water dispersal and wet traction
- Outstanding steering response and handling stability
- Excellent ride comfort with low noise level

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 155/65R13 | 73         | T            | 534                   | 153                | 4.5                     | 365           | 300                |
| 155/70R12 | 73         | H            | 522                   | 161                | 4.5                     | 365           | 300                |
| 155/70R12 | 73         | T            | 522                   | 161                | 4.5                     | 365           | 300                |
| 155/70R13 | 75         | T            | 549                   | 155                | 4.5                     | 387           | 300                |
| 165/60R14 | 75         | H            | 555                   | 170                | 5.0                     | 387           | 300                |
| 165/65R13 | 77         | H/T          | 545                   | 168                | 5.0                     | 412           | 300                |
| 165/65R14 | 83-XL      | T            | 571                   | 167                | 5.0                     | 487           | 340                |
| 165/70R13 | 79         | H            | 563                   | 171                | 5.0                     | 347           | 300                |
| 165/70R14 | 81         | H            | 588                   | 171                | 5.5                     | 462           | 300                |
| 165/80R13 | 87-XL      | T            | 593                   | 171                | 4.5                     | 545           | 340                |
| 175/50R15 | 75         | H            | 554                   | 180                | 5.5                     | 387           | 300                |
| 175/60R13 | 77         | H            | 538                   | 176                | 5.0                     | 412           | 300                |
| 175/65R14 | 82         | H            | 586                   | 176                | 5.0                     | 475           | 300                |
| 175/65R14 | 82         | T            | 586                   | 176                | 5.0                     | 475           | 300                |
| 175/65R15 | 88-XL      | H            | 611                   | 174                | 5.0                     | 560           | 340                |
| 175/70R13 | 82         | T            | 576                   | 178                | 5.0                     | 475           | 300                |
| 175/70R13 | 86-XL      | H            | 576                   | 178                | 5.0                     | 530           | 340                |
| 175/70R14 | 84         | H            | 603                   | 177                | 5.0                     | 500           | 300                |
| 185/55R15 | 82         | V            | 586                   | 194                | 6.0                     | 475           | 300                |
| 185/60R13 | 80         | H            | 553                   | 189                | 5.5                     | 450           | 300                |
| 185/60R14 | 82         | H            | 578                   | 192                | 5.5                     | 475           | 300                |
| 185/60R14 | 86-XL      | V            | 579                   | 187                | 5.5                     | 530           | 340                |
| 185/60R15 | 84         | H            | 603                   | 190                | 5.5                     | 500           | 300                |
| 185/65R14 | 90-XL      | H            | 598                   | 187                | 5.5                     | 600           | 340                |
| 185/65R15 | 88         | H            | 621                   | 189                | 5.5                     | 560           | 300                |
| 185/70R13 | 86         | H            | 590                   | 190                | 5.5                     | 530           | 300                |
| 185/70R14 | 88         | H            | 616                   | 188                | 5.5                     | 560           | 300                |
| 195/50R15 | 82         | V            | 576                   | 197                | 6.0                     | 475           | 300                |
| 195/50R15 | 86-XL      | V            | 576                   | 197                | 6.0                     | 530           | 340                |



# PS01

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 195/50R15 | 86-XL      | V            | 575                   | 198                | 6.0                     | 530           | 340                |
| 195/55R15 | 85         | V            | 594                   | 195                | 6.0                     | 515           | 300                |
| 195/55R15 | 89-XL      | V            | 594                   | 195                | 6.0                     | 580           | 340                |
| 195/60R15 | 88         | H            | 616                   | 200                | 6.0                     | 560           | 300                |
| 195/60R15 | 88         | V            | 616                   | 200                | 6.0                     | 560           | 300                |
| 195/65R15 | 91         | H            | 636                   | 202                | 6.0                     | 615           | 300                |
| 195/65R15 | 95-XL      | V            | 637                   | 199                | 6.0                     | 690           | 340                |
| 195/70R14 | 91         | H            | 631                   | 203                | 6.0                     | 615           | 300                |
| 205/55R16 | 94-XL      | V            | 635                   | 210                | 6.5                     | 670           | 340                |
| 205/60R14 | 88         | H            | 605                   | 211                | 6.0                     | 560           | 300                |
| 205/60R15 | 91         | H            | 627                   | 208                | 6.0                     | 615           | 300                |
| 205/60R16 | 92         | H            | 655                   | 212                | 6.0                     | 630           | 300                |
| 205/65R15 | 95         | H            | 648                   | 210                | 6.0                     | 690           | 300                |
| 205/65R15 | 99-XL      | V            | 648                   | 210                | 6.0                     | 775           | 340                |
| 205/65R16 | 95         | H            | 675                   | 207                | 6.0                     | 690           | 300                |
| 205/70R14 | 98-XL      | H            | 644                   | 210                | 6.0                     | 750           | 340                |
| 205/70R15 | 96         | H            | 668                   | 212                | 6.0                     | 710           | 300                |
| 215/55R17 | 94         | V            | 672                   | 223                | 7.0                     | 670           | 300                |
| 215/60R16 | 95         | V            | 666                   | 221                | 6.5                     | 690           | 300                |
| 215/65R15 | 96         | H            | 662                   | 224                | 6.5                     | 710           | 300                |
| 215/70R15 | 98         | H            | 683                   | 224                | 6.5                     | 750           | 300                |
| 225/55R16 | 95         | V            | 656                   | 228                | 7.0                     | 690           | 300                |
| 225/60R15 | 96         | H            | 653                   | 227                | 6.5                     | 710           | 300                |
| 225/60R16 | 98         | H            | 678                   | 227                | 6.5                     | 750           | 300                |
| 235/55R17 | 103-XL     | V            | 694                   | 239                | 7.5                     | 875           | 340                |
| 235/60R16 | 100        | H            | 689                   | 238                | 7.0                     | 800           | 300                |



TOMORROW'S TYRE TODAY







P5S5

- Unidirectional V-shaped tread pattern to improve handling
- Advanced silica compound for improving wet traction and lowering rolling resistance
- Slim shoulder grooves lower induced vibration and reduce noise
- Strategically positioned chamfered S-block design reduces pitch noise frequency
- High tensile steel belts for a smooth ride
- Excellent cornering and handling stability

| Tyre Size  | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 195/45R16  | 84-XL      | V            | 585                   | 193                | 7.0                     | 500           | 340                |
| 195/50R15  | 82         | V            | 575                   | 197                | 6.0                     | 475           | 300                |
| 195/55R15  | 85         | V            | 594                   | 195                | 6.0                     | 515           | 300                |
| 195/55R16  | 91-XL      | V            | 620                   | 195                | 6.0                     | 615           | 340                |
| 205/40ZR16 | 83-XL      | W            | 570                   | 212                | 7.5                     | 487           | 340                |
| 205/40ZR17 | 84-XL      | W            | 593                   | 220                | 7.5                     | 500           | 340                |
| 205/45ZR16 | 87-XL      | W            | 590                   | 210                | 7.0                     | 545           | 340                |
| 205/45ZR17 | 88-XL      | W            | 616                   | 210                | 7.0                     | 560           | 340                |
| 215/45ZR17 | 91-XL      | W            | 625                   | 213                | 7.0                     | 615           | 340                |
| 215/50ZR17 | 95-XL      | W            | 645                   | 222                | 7.0                     | 690           | 340                |
| 215/55ZR17 | 98-XL      | W            | 667                   | 220                | 7.0                     | 750           | 340                |
| 225/40ZR17 | 90-XL      | W            | 609                   | 233                | 8.0                     | 600           | 340                |
| 225/40ZR18 | 92-XL      | W            | 636                   | 233                | 8.0                     | 630           | 340                |
| 225/45ZR17 | 94-XL      | W            | 635                   | 224                | 7.5                     | 670           | 340                |
| 225/45ZR18 | 95-XL      | W            | 660                   | 222                | 7.5                     | 690           | 340                |
| 225/50ZR17 | 98-XL      | W            | 656                   | 230                | 7.0                     | 750           | 340                |
| 225/55ZR17 | 101-XL     | W            | 678                   | 228                | 7.0                     | 825           | 340                |
| 225/60R18  | 100        | V            | 733                   | 223                | 6.5                     | 800           | 300                |
| 235/40ZR18 | 95-XL      | W            | 641                   | 247                | 8.5                     | 690           | 340                |
| 235/45ZR18 | 98-XL      | W            | 668                   | 234                | 8.0                     | 750           | 340                |
| 235/50ZR18 | 101-XL     | W            | 691                   | 242                | 7.5                     | 825           | 340                |
| 245/40ZR19 | 98-XL      | W            | 679                   | 247                | 7.5                     | 750           | 340                |
| 245/45ZR17 | 95         | W            | 652                   | 242                | 7.5                     | 690           | 350                |
| 245/45ZR18 | 100-XL     | W            | 674                   | 240                | 8.0                     | 800           | 340                |
| 245/45ZR19 | 102-XL     | W            | 705                   | 239                | 7.5                     | 850           | 340                |
| 265/40R22  | 106-XL     | V            | 776                   | 266                | 9.5                     | 950           | 340                |
| 265/45R22  | 109-XL     | V            | 801                   | 268                | 9.0                     | 1030          | 340                |
| 265/50R20  | 111-XL     | V            | 775                   | 273                | 8.5                     | 1090          | 340                |





PL199



- Advanced tread compound resists heat generation, wear and tear
- Excellent driving and handling stability
- Low rolling resistance for improved fuel efficiency
- Outstanding manoeuvrability
- Extra strong casing to resist punctures and abrasion

| Tyre Size | Load Index   | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|--------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 6.50R15   | 107/105-10PR | N            | 731                   | 185                | 5.5                     | 975           | 550                |
| 6.50R16   | 108/107-10PR | N            | 751                   | 186                | 5.5                     | 1000          | 500                |
| 7.00R15   | 114/112-12PR | N            | 756                   | 198                | 5.5                     | 1080          | 525                |
| 7.00R16   | 116/114-12PR | N            | 782                   | 198                | 5.5                     | 1250          | 600                |
| 7.50R16   | 121/120-12PR | L            | 806                   | 210                | 6.0                     | 1440          | 650                |





PV99

- Specially formulated rugged compound provides excellent abrasion resistance and even wear for long lasting wear and uniformity
- Jointless spiral-wrapped full nylon cap for added strength and stability
- Tread pattern delivers a smooth and quiet ride
- Exceptional handling in various road and weather conditions



| Tyre Size   | Load Index   | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-------------|--------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 155R12C     | 88/86-8PR    | N            | 553                   | 158                | 4.5                     | 560           | 450                |
| 155R13C     | 91/89-8PR    | N            | 582                   | 154                | 4.5                     | 615           | 450                |
| 165R13C     | 94/93-8PR    | R            | 599                   | 167                | 4.5                     | 670           | 450                |
| 175R13C     | 97/95-8PR    | Q            | 613                   | 177                | 5.0                     | 730           | 450                |
| 185R14C     | 102/100-8PR  | R            | 652                   | 190                | 5.5                     | 850           | 450                |
| 195/75R16C  | 107/105-8PR  | R            | TBD                   | TBD                | 4.5                     | 975           | 475                |
| 195/75R16C  | 110/108-10PR | N            | 582                   | 154                | 4.5                     | 1060          | 525                |
| 195R14C     | 106/104-8PR  | R            | 667                   | 201                | 5.5                     | 950           | 450                |
| 195R15C     | 106/104-8PR  | R            | 694                   | 199                | 5.5                     | 950           | 450                |
| 205R14C     | 109/107-8PR  | Q            | 689                   | 209                | 6.0                     | 1030          | 450                |
| 225/70R15C  | 116/114-10PR | Q            | 698                   | 231                | 6.5                     | 1250          | 550                |
| 5.00R12LT   | 83/81-8PR    | P            | 570                   | 143                | 3.5                     | 485           | 450                |
| 5.50R12LT   | 92/90-10PR   | P            | 602                   | 165                | 4.0                     | 630           | 500                |
| 5.50R13LT   | 97/95-12PR   | N            | 629                   | 163                | 4.0                     | 730           | 625                |
| LT235/85R16 | 120/116-10PR | R            | 805                   | 244                | 6.5                     | 1380          | 550                |





P V 98



- Specially formulated rugged compound provides excellent abrasion resistance and even wear for long lasting wear and uniformity
- Jointless spiral-wrapped full nylon cap for added strength and stability
- Tread pattern delivers a smooth and quiet ride
- Exceptional handling in various road and weather conditions

| Tyre Size  | Load Index   | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|------------|--------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 185/75R16C | 104/102-8PR  | R            | 687                   | 187                | 5.0                     | 900           | 475                |
| 195/70R15C | 104/102-8PR  | R            | 658                   | 203                | 6.0                     | 900           | 450                |
| 195R14C    | 106/104-8PR  | P            | 668                   | 206                | 5.5                     | 950           | 450                |
| 205/65R15C | 102/100-6PR  | T            | 650                   | 209                | 6.0                     | 850           | 375                |
| 205/65R16C | 107/105-8PR  | T            | 676                   | 209                | 6.0                     | 975           | 475                |
| 205/70R14C | 102/100-8PR  | Q            | 646                   | 213                | 6.0                     | 850           | 375                |
| 205/70R15C | 106/104-8PR  | Q            | 673                   | 213                | 6.0                     | 950           | 450                |
| 205/75R14C | 109/107-8PR  | Q            | 667                   | 207                | 5.5                     | 1030          | 475                |
| 205/75R16C | 110/108-8PR  | R            | 717                   | 205                | 5.5                     | 1060          | 475                |
| 205/75R16C | 113/111-10PR | R            | 717                   | 204                | 5.5                     | 1150          | 525                |
| 215/65R15C | 104/102-6PR  | R            | 664                   | 223                | 6.5                     | 900           | 375                |
| 215/65R16C | 109/107-8PR  | T            | 689                   | 223                | 6.5                     | 1030          | 475                |
| 215/70R15C | 109/107-8PR  | Q            | 687                   | 226                | 6.5                     | 1030          | 450                |
| 215/70R16C | 116/114-10PR | P            | 711                   | 224                | 6.5                     | 1250          | 525                |
| 215/75R16C | 113/111-8PR  | R            | 730                   | 222                | 6.0                     | 1150          | 475                |
| 215/75R16C | 116/114-10PR | R            | 729                   | 221                | 6.0                     | 1250          | 525                |
| 225/70R15C | 112/110-8PR  | R            | 699                   | 233                | 6.5                     | 1120          | 450                |
| 235/65R16C | 115/113-8PR  | T            | 714                   | 245                | 7.0                     | 1215          | 475                |





PV97



- Rugged tread compound
- Rib tread design for better handling and improved mileage
- Special sipe design
- Full nylon cap ply
- Good abrasion resistance and even wear
- Good peripheral drainage
- Smooth ride comfort and low noise level
- Outstanding manoeuvrability

| Tyre Size | Load Index  | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|-------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 195R14C   | 106/104-8PR | P            | 676                   | 206                | 5.5                     | 950           | 450                |
| 205R14C   | 109/107-8PR | P            | 698                   | 219                | 6.0                     | 1030          | 450                |
| 6.50R14LT | 97/95-8PR   | N            | 696                   | 187                | 4.5                     | 760           | 450                |





P77

- Multi-pitch tread design for a smoother quiet ride
- Jointless spiral-wrapped full nylon cap for added strength and stability
- Stronger sidewall stiffness for handling and corner stability
- Innovative tread compound promotes outstanding wet/dry traction and comfort



| Tyre Size     | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|---------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 205/70R15     | 100-XL     | S            | 672                   | 205                | 6.0                     | 800           | 340                |
| 205/75R14     | 95         | S            | 663                   | 198                | 5.5                     | 690           | 300                |
| 215/65R16     | 98         | H            | 687                   | 221                | 6.0                     | 750           | 300                |
| 215/70R15     | 98         | S            | 684                   | 221                | 6.5                     | 750           | 300                |
| 215/70R16     | 99         | H            | 710                   | 223                | 6.0                     | 775           | 300                |
| 225/60R17     | 99         | H            | 706                   | 220                | 6.5                     | 775           | 300                |
| 225/65R17     | 102        | S            | 727                   | 223                | 6.5                     | 850           | 300                |
| 225/65R17     | 102        | T            | 727                   | 217                | 6.0                     | 850           | 300                |
| 225/70R15     | 100        | S            | 698                   | 231                | 6.5                     | 800           | 300                |
| 225/70R16     | 107-XL     | T            | 725                   | 224                | 6.5                     | 975           | 340                |
| 225/75R15     | 102        | S            | 718                   | 221                | 6.0                     | 850           | 300                |
| 235/60R18     | 103        | H            | 744                   | 235                | 7.0                     | 875           | 300                |
| 235/65R17     | 104        | T            | TBD                   | TBD                | 7.0                     | 900           | 300                |
| 235/70R15     | 103        | S            | 712                   | 241                | 7.0                     | 875           | 300                |
| 235/70R16     | 106        | S            | 736                   | 238                | 7.0                     | 950           | 300                |
| 235/70R16     | 106        | T            | 737                   | 238                | 6.0                     | 950           | 300                |
| 235/75R15     | 105        | S            | 732                   | 233                | 6.5                     | 925           | 300                |
| 245/65R17     | 107        | S            | 752                   | 242                | 7.0                     | 975           | 300                |
| 245/70R16     | 107        | S            | 751                   | 252                | 7.0                     | 975           | 300                |
| 245/75R16     | 111        | S            | 774                   | 247                | 7.0                     | 1090          | 300                |
| 255/60R17     | 106        | H            | 741                   | 252                | 7.5                     | 950           | 300                |
| 255/70R15     | 108        | S            | 739                   | 262                | 7.5                     | 1000          | 300                |
| 255/70R16     | 111        | S            | 765                   | 256                | 7.5                     | 1090          | 300                |
| 255/70R18     | 113        | H            | 819                   | 255                | 7.5                     | 1150          | 300                |
| 265/60R18     | 110        | S            | 777                   | 265                | 8.0                     | 1060          | 300                |
| 265/65R17     | 112        | S            | 778                   | 263                | 8.0                     | 1120          | 300                |
| 265/65R18     | 114        | H            | 805                   | 262                | 8.0                     | 1180          | 300                |
| 265/70R16     | 112        | S            | 778                   | 276                | 8.0                     | 1120          | 300                |
| 265/70R17     | 115        | S            | 807                   | 270                | 8.0                     | 1215          | 300                |
| 265/70R18     | 116        | S            | 831                   | 271                | 8.0                     | 1250          | 300                |
| 265/75R16     | 116        | S            | 802                   | 269                | 7.5                     | 1250          | 300                |
| 275/55R20     | 113        | T            | TBD                   | TBD                | 8.5                     | 1150          | 300                |
| 275/60R20     | 115        | S            | TBD                   | TBD                | 8.0                     | 1215          | 300                |
| 275/65R18     | 116        | H            | 820                   | 273                | 8.0                     | 1250          | 300                |
| 275/70R16     | 114        | S            | 795                   | 274                | 8.0                     | 1180          | 300                |
| 285/65R17     | 116        | H            | 806                   | 286                | 8.5                     | 1250          | 300                |
| 30X9.50R15LT  | 104-6PR    | S            | 745                   | 249                | 7.5                     | 900           | 350                |
| 31X10.50R15LT | 109-6PR    | S            | 769                   | 276                | 8.5                     | 1030          | 350                |





P188



- Tread pattern and sidewall lug design offers excellent all-terrain traction
- Compound and pattern design improve tread wear, wet traction and hydroplaning resistance
- Stiff but conformable carcass improves off-road stability and handling
- Centre-rib tread design gives outstanding high speed handling stability

| Tyre Size    | Load Index   | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|--------------|--------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 205R16C      | 110/108-8PR  | Q            | 737                   | 210                | 6.0                     | 1060          | 450                |
| 30X9.5R15LT  | 104-6PR      | S            | 746                   | 245                | 7.5                     | 900           | 350                |
| 31X10.5R15LT | 109-6PR      | S            | 768                   | 279                | 8.5                     | 1030          | 350                |
| 205/70R15    | 96           | T            | 672                   | 208                | 6.0                     | 710           | 300                |
| 205/75R15    | 97           | T            | 691                   | 206                | 5.5                     | 730           | 300                |
| 215/65R16    | 98           | T            | 687                   | 220                | 6.5                     | 750           | 300                |
| 215/70R16    | 100          | T            | 711                   | 218                | 6.5                     | 800           | 300                |
| 225/70R16    | 103          | T            | 721                   | 228                | 6.5                     | 875           | 300                |
| 235/60R16    | 104-XL       | H            | 688                   | 236                | 7.0                     | 900           | 340                |
| 235/65R17    | 108-XL       | H            | 739                   | 240                | 7.0                     | 1000          | 340                |
| 235/70R16    | 106          | T            | 733                   | 240                | 7.0                     | 950           | 300                |
| 235/75R15    | 109-XL       | T            | 736                   | 236                | 6.5                     | 1030          | 340                |
| 245/70R16    | 111-XL       | S            | 748                   | 251                | 7.0                     | 1090          | 340                |
| 265/70R15    | 112          | T            | 752                   | 270                | 8.0                     | 1120          | 300                |
| 265/70R16    | 112          | S            | 778                   | 271                | 8.0                     | 1120          | 300                |
| LT225/75R15  | 102/99-6PR   | S            | 717                   | 229                | 6.0                     | 850           | 350                |
| LT225/75R16  | 115/112-10PR | Q            | 744                   | 228                | 6.0                     | 1215          | 550                |
| LT235/75R15  | 104/101-6PR  | S            | 731                   | 244                | 6.5                     | 900           | 350                |





- Aggressive lug shoulder design
- Extra large and deep tread
- Strong and tough casing reinforces puncture resistance
- Molded for ice studs to provide extra traction
- Deliver excellent traction on mud and rock
- Maximum puncture resistance and off-road durability
- Enhance traction and braking power on all hard surfaces, wet or dry

| Tyre Size    | Load Index  | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|--------------|-------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 31X10.5R15LT | 109-6PR     | S            | 778                   | 279                | 8.5                     | 1030          | 350                |
| 245/70R16    | 111-XL      | S            | 748                   | 245                | 7.0                     | 1090          | 340                |
| 30X9.5R15LT  | 104-6PR     | Q            | 753                   | 249                | 7.5                     | 900           | 350                |
| LT 265/75R16 | 112/109-6PR | N            | 814                   | 271                | 7.5                     | 1120          | 350                |
| P265/70R16   | 112         | S            | 777                   | 271                | 8.0                     | 1120          | 300                |





P101

- Advanced tread compound formulation
- Unidirectional tread design
- Specially developed for use in severe winter conditions
- Outstanding braking and handling
- Random pitch arrangement for low noise
- Pinned for studs

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 175/65R14 | 86         | T            | 585                   | 175                | 5.0                     | 530           | 340                |
| 175/70R13 | 82         | T            | 580                   | 175                | 5.0                     | 475           | 300                |
| 185/60R14 | 82         | T            | 581                   | 185                | 5.5                     | 475           | 300                |
| 185/60R15 | 88         | T            | 608                   | 186                | 5.5                     | 560           | 340                |
| 185/65R14 | 90-XL      | T            | 597                   | 187                | 5.5                     | 600           | 340                |
| 185/65R15 | 92         | T            | 621                   | 187                | 5.5                     | 630           | 340                |
| 185/70R14 | 88         | T            | 619                   | 190                | 5.5                     | 560           | 300                |
| 195/55R15 | 89         | T            | 599                   | 199                | 6.0                     | 580           | 340                |
| 195/60R15 | 92         | T            | 619                   | 200                | 6.0                     | 630           | 340                |
| 195/65R15 | 95         | T            | 637                   | 200                | 6.0                     | 690           | 340                |
| 205/55R16 | 91         | T            | 635                   | 211                | 6.5                     | 615           | 300                |
| 205/60R16 | 96         | T            | 657                   | 204                | 6.0                     | 710           | 340                |
| 205/65R15 | 99         | T            | 648                   | 210                | 6.0                     | 775           | 340                |
| 215/55R16 | 97-XL      | T            | 645                   | 225                | 7.0                     | 730           | 340                |
| 215/55R17 | 94         | T            | 672                   | 224                | 7.0                     | 670           | 300                |
| 215/60R16 | 99         | T            | 668                   | 217                | 6.5                     | 775           | 340                |
| 225/50R17 | 98-XL      | T            | 659                   | 230                | 7.0                     | 750           | 340                |





P102



- Advanced tread compound formulation for ice and snow conditions
- Special shoulder design for snow in straight and lateral traction
- Saw-toothed block and high-density sipes arrangement improved grip in snow and ice
- Tread surface diamond shapes engraving to aid in grip on ice
- Three dimensional sipe design to advance wet gripping

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 175/65R14 | 86         | Q            | 588                   | 175                | 5.0                     | 530           | 340                |
| 175/70R13 | 82         | Q            | 580                   | 176                | 5.0                     | 475           | 300                |
| 185/60R14 | 84         | Q            | 582                   | 185                | 5.5                     | 475           | 300                |
| 185/65R14 | 86         | Q            | 599                   | 188                | 5.5                     | 530           | 300                |
| 185/65R15 | 88         | Q            | 625                   | 189                | 5.5                     | 560           | 300                |
| 185/70R14 | 88         | Q            | 620                   | 188                | 5.5                     | 560           | 300                |
| 195/60R15 | 92         | Q            | 619                   | 197                | 6.0                     | 630           | 340                |
| 195/65R15 | 91         | Q            | 638                   | 201                | 6.0                     | 615           | 300                |
| 205/55R16 | 91         | Q            | 634                   | 204                | 6.5                     | 615           | 300                |
| 205/60R16 | 92         | Q            | 657                   | 205                | 6.0                     | 630           | 300                |
| 205/65R15 | 94         | Q            | 650                   | 209                | 6.0                     | 670           | 300                |
| 205/70R15 | 100        | Q            | 671                   | 211                | 6.0                     | 800           | 340                |
| 215/55R16 | 93         | Q            | 644                   | 217                | 7.0                     | 650           | 300                |
| 215/55R17 | 98         | Q            | 671                   | 218                | 7.0                     | 750           | 340                |
| 215/60R16 | 95         | Q            | 670                   | 217                | 6.5                     | 690           | 300                |





P114

- Stepped Shoulder – for lateral stability and snow traction
- Diamond-shaped Tread Surface – for ice grip
- 3D SIPE – for wet/snow traction
- Unique Softener - for road holding

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 215/65R16 | 98         | R            | 682                   | 222                | 6.0                     | 750           | 300                |
| 215/70R16 | 100        | R            | 708                   | 222                | 6.0                     | 800           | 300                |
| 225/65R17 | 102        | Q            | 772                   | 226                | 6.0                     | 850           | 300                |
| 225/70R16 | 103        | R            | 722                   | 228                | 6.0                     | 875           | 300                |
| 235/65R17 | 108        | R            | 734                   | 246                | 6.0                     | 1000          | 340                |
| 235/70R16 | 106        | R            | 735                   | 243                | 6.0                     | 950           | 300                |
| 235/75R15 | 105        | R            | 732                   | 213                | 6.0                     | 925           | 300                |
| 245/70R16 | 107        | R            | 750                   | 246                | 6.0                     | 975           | 300                |
| 265/65R17 | 112        | R            | 773                   | 274                | 6.0                     | 1120          | 300                |
| 265/70R16 | 112        | R            | 777                   | 274                | 6.0                     | 1120          | 300                |





PR101H



- Excellent handling stability
- Central groove geometry design prevent stone biting
- Low heat generation extend casing life

| Tyre Size   | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 9.00R20     | 140/137    | K            | 1026                  | 258                | 7.00                    | 2500          | 725                |
| 10.00R20    | 147/143    | K            | 1052                  | 282                | 7.50                    | 3075          | 800                |
| 11.00R20    | 150/146    | K            | 1084                  | 296                | 8.00                    | 3350          | 825                |
| 11.00R22    | 152/149    | K            | 1136                  | 297                | 8.00                    | 3550          | 830                |
| 11R22.5     | 148/145    | M            | 1053                  | 282                | 8.25                    | 3150          | 850                |
| 12R22.5     | 152/148    | L            | 1084                  | 306                | 9.00                    | 3550          | 850                |
| 275/80R22.5 | 149/146    | M            | 1022                  | 276                | 8.25                    | 3250          | 850                |
| 295/80R22.5 | 152/148    | M            | 1054                  | 302                | 9.00                    | 3550          | 850                |
| 315/80R22.5 | 154/151    | M            | 1082                  | 315                | 9.00                    | 3750          | 825                |
| 385/65R22.5 | 160        | K            | 1078                  | 374                | 11.75                   | 4500          | 900                |





PD868P



- Advanced block pattern design
- Optimized construction contributed to even footprint pressure distribution
- Low heat generation compound extend casing life

| Tyre Size       | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 11R22.5 M+S     | 148/145    | L            | 1064                  | 283                | 8.25                    | 3150          | 850                |
| 12R22.5 M+S     | 152/148    | L            | 1091                  | 302                | 9.00                    | 3550          | 850                |
| 295/80R22.5 M+S | 152/148    | M            | 1066                  | 304                | 9.00                    | 3550          | 850                |
| 315/80R22.5 M+S | 156/150    | M            | 1098                  | 320                | 9.00                    | 4000          | 850                |





PL909H

- Multi-curved rib pattern design offer driving and handling stability
- Advanced tread compound provide wear life and cutting&chipping resistance
- High durability and excellent retreadability

| Tyre Size       | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 10.00R20 M+S    | 147/143    | K            | 1058                  | 276                | 7.50                    | 3075          | 800                |
| 11.00R20 M+S    | 150/146    | K            | 1104                  | 293                | 8.00                    | 3350          | 825                |
| 12.00R20 M+S    | 154/150    | K            | 1123                  | 314                | 8.50                    | 3750          | 850                |
| 11R22.5         | 148/145    | K            | 1057                  | 280                | 8.25                    | 3150          | 850                |
| 12R22.5 M+S     | 152/148    | K            | 1100                  | 300                | 9.00                    | 3550          | 850                |
| 315/80R22.5 M+S | 154/151    | K            | 1087                  | 314                | 9.00                    | 3750          | 825                |





PA929P



- All position pattern design for mild off road
- Great tear resistance compound without compromise mileage
- High durability casing

| Tyre Size    | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|--------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 12.00R24 M+S | 160/156    | K            | 1212                  | 311                | 8.50                    | 4500          | 850                |





PA959P

- Powerful traction
- Optimal shoulder design extend uniform-wear
- Cut resistance & High durability.

| Tyre Size | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 10.00R20  | 147/143    | K            | 1060                  | 278                | 7.50                    | 3075          | 800                |
| 11R22.5   | 148/145    | K            | 1058                  | 282                | 8.25                    | 3150          | 850                |





PR101



- Excellent handling stability
- Stone rejection and long wear life
- Extend casing life and retreadability

| Tyre Size   | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 7.50R16     | 122/121    | L            | 808                   | 210                | 6.00                    | 1510          | 700                |
| 8.25R16     | 128/126    | M            | 855                   | 229                | 6.50                    | 1800          | 675                |
| 8.25R16     | 131/129    | M            | 856                   | 229                | 6.50                    | 1950          | 775                |
| 9.5R17.5    | 129/127    | L            | 844                   | 236                | 6.50                    | 1850          | 750                |
| 205/75R17.5 | 124/122    | M            | 761                   | 204                | 6.00                    | 1600          | 750                |
| 215/75R17.5 | 126/124    | M            | 773                   | 212                | 6.00                    | 1700          | 700                |
| 235/75R17.5 | 132/130    | M            | 805                   | 236                | 6.75                    | 2000          | 775                |





PD868



- Advanced block pattern design
- Optimized construction contributed to even footprint pressure distribution
- Low heat generation compound extend casing life

| Tyre Size       | Load Index | Speed Rating | Overall Diameter (mm) | Section Width (mm) | Nominal Rim Width (in.) | Max Load (kg) | Max Pressure (kPa) |
|-----------------|------------|--------------|-----------------------|--------------------|-------------------------|---------------|--------------------|
| 215/75R17.5 M+S | 126/124    | M            | 772                   | 214                | 6.00                    | 1700          | 700                |



**PRESA**  
TOMORROW'S TYRE TODAY